

Gipskartondecke Plasterboard Ceiling

Mattentyp // Superfast
Mat Type

Länge // 500 mm - 8000 mm
Length

1. Mattenstam // Ø 20 mm
Main Tube

5. Abstandhalter // 10 mm
Spacer Holder

2. Verbindungsmuffen // Ø 30 mm
Connection Element


6. Unterkonstruktion
Secondary structure
B = 60 mm, H = 27 mm

3. Kapillarrohr // Ø 3.4 mm
Capillary Tube

7. Hangprofil
Hanging System

4. Lampe Loch // Max. Ø 100 mm
Lamp Spacing

8. Gipskarton 12.5 mm
Plasterboard

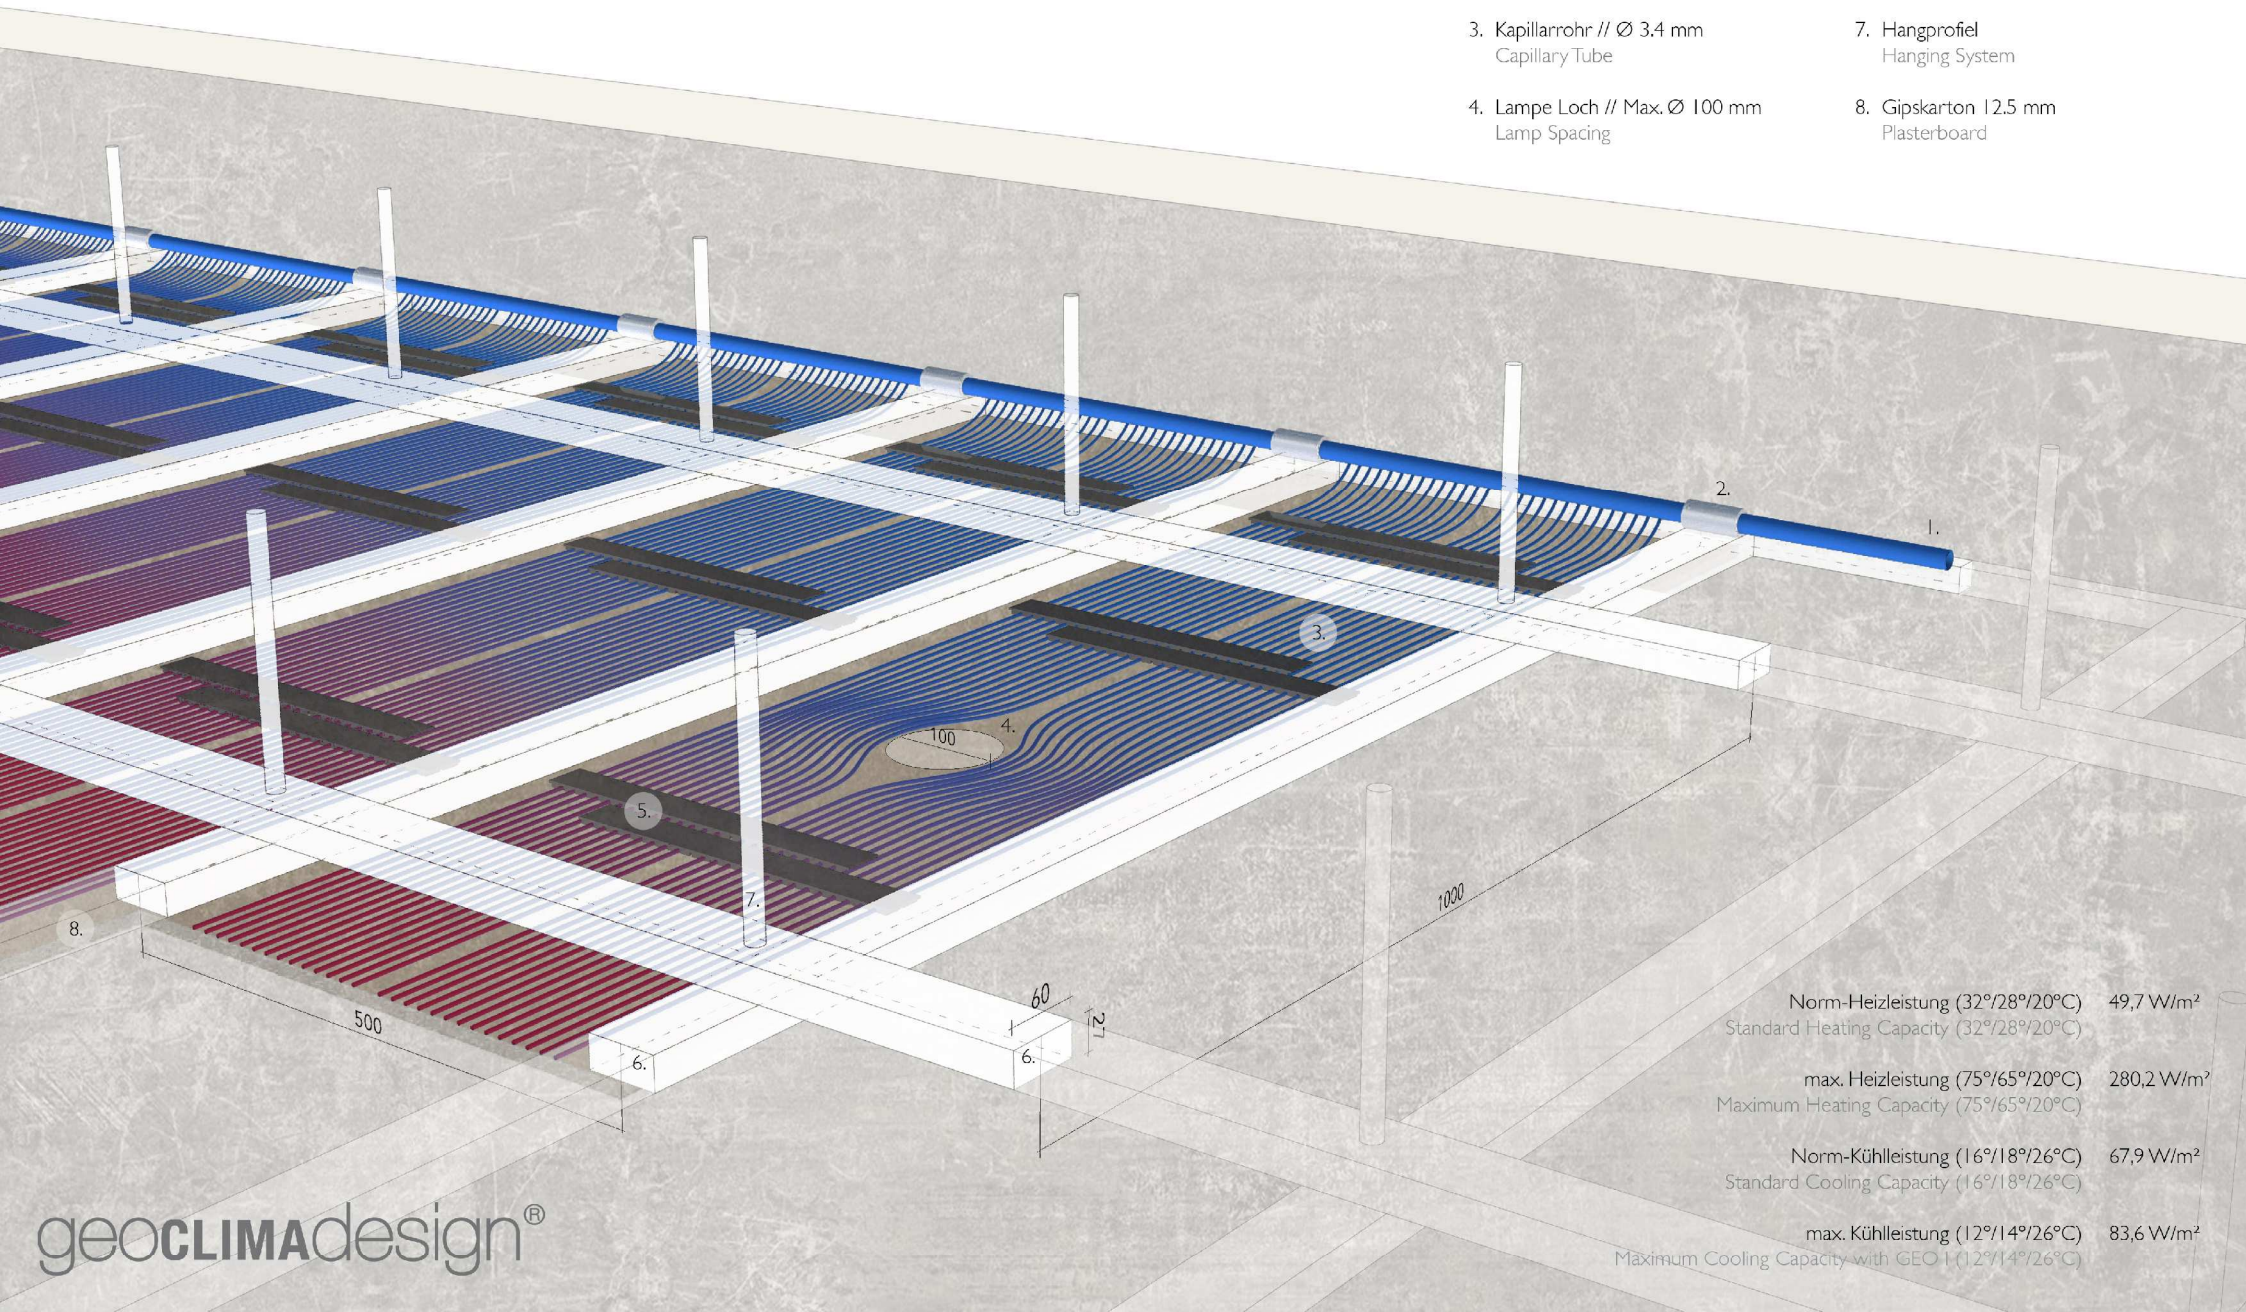

Norm-Heizleistung (32°/28°/20°C) 49,7 W/m²
Standard Heating Capacity (32°/28°/20°C)

max. Heizleistung (75°/65°/20°C) 280,2 W/m²
Maximum Heating Capacity (75°/65°/20°C)

Norm-Kühlleistung (16°/18°/26°C) 67,9 W/m²
Standard Cooling Capacity (16°/18°/26°C)

max. Kühlleistung (12°/14°/26°C) 83,6 W/m²
Maximum Cooling Capacity with GEO I (12°/14°/26°C)